



# SWEP BX8T

The X-marked BX8T is a good choice for a variety of one-phase and two-phase applications in many industries. Its efficient heat transfer can be utilized in applications such as container refrigeration and heat pumps. The X-plates on front and back give structural stability while being active heat transfer plates. This All-Active plate pack maximizes the material utilization and makes the product an efficient and competitive product for demanding applications.

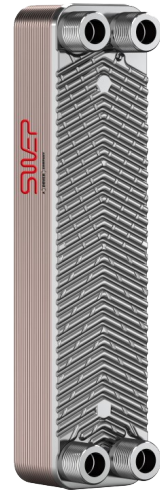

<b>Maximum number of plates (NoP)</b>	60
<b>Max flow</b>	4 m <sup>3</sup> /h (17.61 gpm)
<b>Channel volume</b>	0.039/0.039 dm <sup>3</sup> (0.0014/0.0014 ft <sup>3</sup> )
<b>Material</b>	316/316L stainless steel plates, copper brazing
<b>Weight excl. connections</b>	0.53+(0.075*NoP) kg 1.16+(0.165*NoP) lb
<b>Max Particle Size (mm)</b>	1

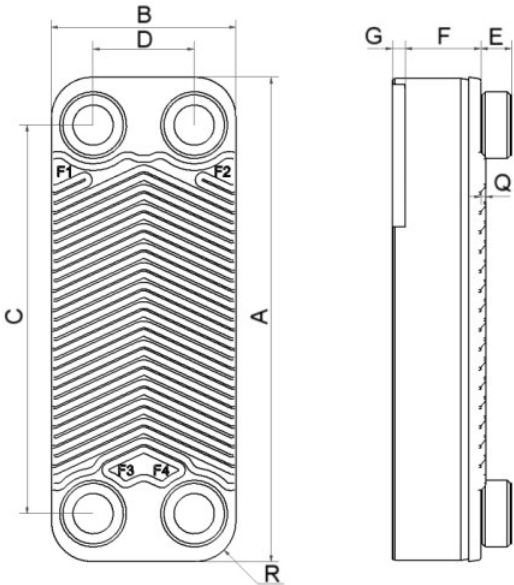

#	MM	IN
A	315	12.4
B	73	2.87
C	278	10.94
D	40	1.57
E_1	20	0.79
E_2	48	1.89
F	2+(2.24*(NoP-2))	0.08 (0.08*(NoP-0.08))
G	7	0.28
Q	2	0.08
R	16	0.63



Threaded Connection   Solder Connection   Combo Connection   Hose Connection

