


SWEP B4

The B4 enables efficient heat exchange in applications with extreme demands for compactness and narrow temperature approaches. Easy to install and use, the product is small yet flexible, which makes it a particularly good choice for economizer applications focusing on VRF and heat pumps. The B4's mechanical design makes it suitable for high-pressure refrigerants such as R410A and R32.



Maximum number of plates (NoP)	100
Max flow	1.2 m ³ /h (5.28 gpm)
Channel volume	0.0093/0.0093 dm ³ (0.0003/0.0003 ft ³)
Material	304 Stainless Steel Plates, Copper Brazing
Weight excl. connections	0.48+(0.034*NoP) kg 1.05+(0.075*NoP) lb
Max Particle Size (mm)	0.4

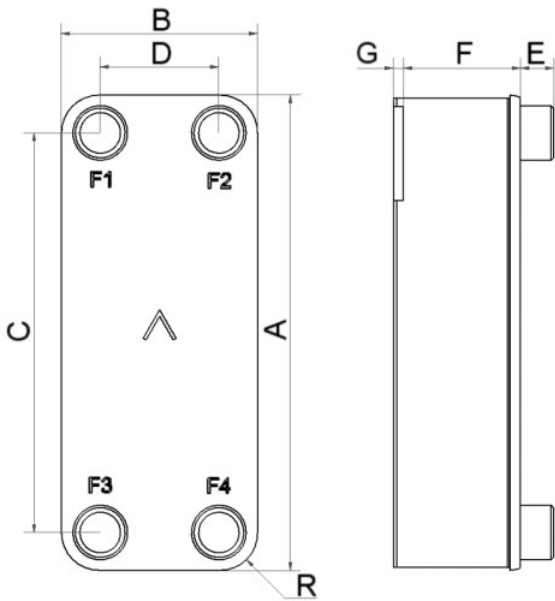

#	MM	IN
A	193.5	7.62
B	76	2.99
C	154	6.06
D	40	1.57
E_1	20	0.79
E_2	45	1.77
F	4+1.02*(NoP)	0.16+0.04 *(NoP)
G	6	0.24
R	18	0.71



Threaded Connection Threaded Ultra High Approved Solder Connection

