


# SWEP BX4T

The BX4T enables a new level of efficient heat exchange, with the X-plates on front and back that give structural stability while being active heat transfer plates. This All-Active plate pack maximizes the material utilization and makes the product an efficient and competitive product for demanding applications and narrow temperature approaches. Easy to install and use, the product is small yet flexible, which makes it a particularly good choice for economizer applications focusing on VRF and heat pumps. The BX4T's mechanical design makes it suitable for high pressure refrigerants such as R410A and R32.



Maximum number of plates (NoP)	100
Max flow	1.2 m³/h (5.28 gpm)
Channel volume	0.0093/0.0093 dm³ (0.0003/0.0003 ft³)
Material	304 Stainless Steel Plates, Copper Brazing
Weight excl. connections	0.26+(0.0405*NoP) kg 0.58+(0.089*NoP) lb
Max Particle Size (mm)	0.4

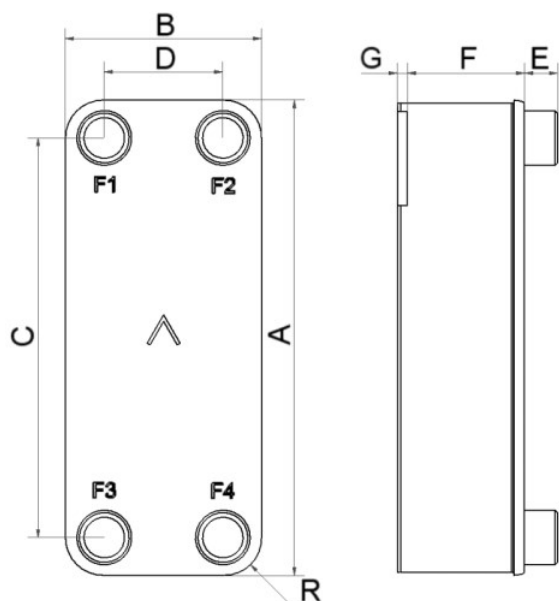

#	MM	IN
A	192.60	7.58
B	75	2.95
C	154	6.06
D	40	1.57
F	$2,00+(1,06*(NoP-2,00))$	$0.08 (NaN*(NoP-0.08))$
G	6	0.24
R	18	0.71
E_1	20	0.79
E_2	12	0.47



Threaded Connection   Solder Connection   Combo Connection   Hose Connection

