


# SWEP B15T

The highly efficient B15T has been developed to have maximum thermal length. Precision optimization allows efficient operation even at extremely small temperature differences, making the product the obvious choice for applications demanding high heat flux and improved energy utilization.



<b>Maximum number of plates (NoP)</b>	60
<b>Max flow</b>	4 m <sup>3</sup> /h (17.61 gpm)
<b>Channel volume</b>	0.063/0.063 dm <sup>3</sup> (0.0022/0.0022 ft <sup>3</sup> )
<b>Material</b>	316/316L stainless steel plates, copper brazing
<b>Weight excl. connections</b>	1.25+(0.104*NoP) kg 2.76+(0.229*NoP) lb
<b>Max Particle Size (mm)</b>	1

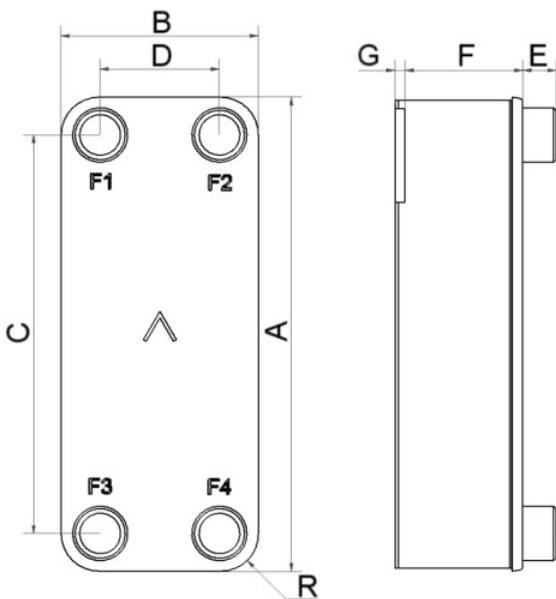

#	MM	IN
A	468	18.43
B	76	2.99
C	432	17.01
D	40	1.57
F	4+2.24*(NoP)	0.16+0.09 *(NoP)
G	7	0.28
R	18	0.71
E_1	20	0.79
E_2	45	1.77

