



# SWEP BX8T

The X-marked BX8T is a good choice for a variety of one-phase and two-phase applications in many industries. Its efficient heat transfer can be utilized in applications such as container refrigeration and heat pumps. The X-plates on front and back give structural stability while being active heat transfer plates. This All-Active plate pack maximizes the material utilization and makes the product an efficient and competitive product for demanding applications.

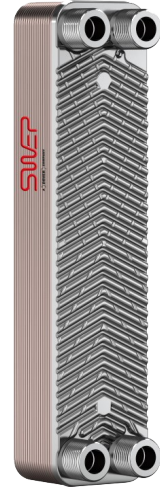


Maximum number of plates (NoP)	60
Max flow	4 m³/h (17.61 gpm)
Channel volume	0.039/0.039 dm³ (0.0014/0.0014 ft³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	0.53+(0.075*NoP) kg 1.16+(0.165*NoP) lb
Max Particle Size (mm)	1

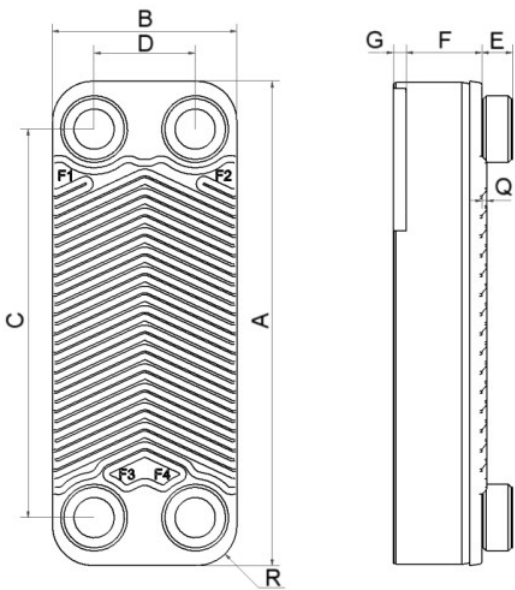

#	MM	IN
A	315	12.4
B	73	2.87
C	278	10.94
D	40	1.57
F	2,00+(2,24*(NoP-2,00))	0.08 (NaN*(NoP-0.08))
G	7	0.28
Q	2	0.08
R	16	0.63
E_1	20	0.79
E_2	48	1.89



Threaded Connection   Solder Connection   Combo Connection   Hose Connection

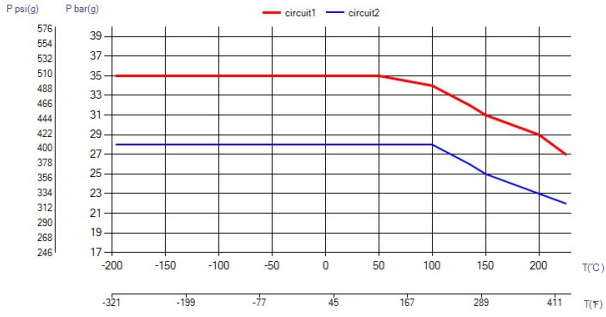

## UL Tryck/Temperatur

