


I

# SWEP B10T


The B10T delivers efficient heat exchange solutions across a wide capacity interval, and is quick and simple to adapt for a number of applications. The product’s compact size, versatility, and excellent heat transfer make it a perfect choice for both single-phase and refrigerant applications.



Maximum number of plates (NoP)	140
Max flow	9 m³/h (39.63 gpm)
Channel volume	0.061/0.061 dm³ (0.0022/0.0022 ft³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	1.15+(0.096*NoP) kg 2.54+(0.212*NoP) lb
Max Particle Size (mm)	1

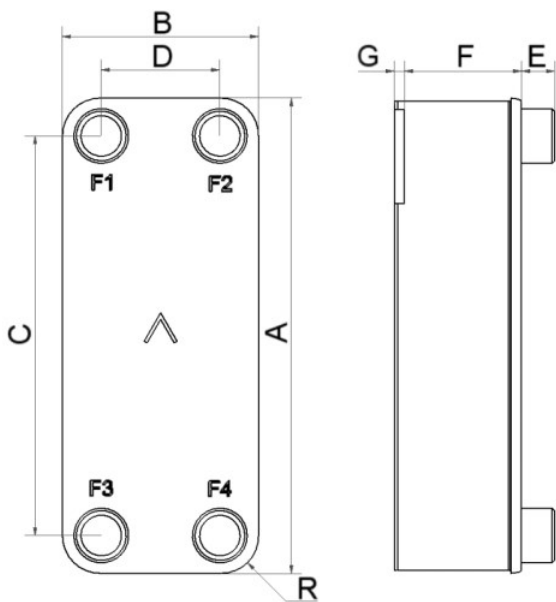

#	MM	IN
A	289	11.38
B	119	4.69
C	243	9.57
D	72	2.83
F	4,00+2,24*(NoP)	0.16+0.09 *(NoP)
G	6	0.24
R	22	0.87
E_1	20	0.79
E_2	45	1.77

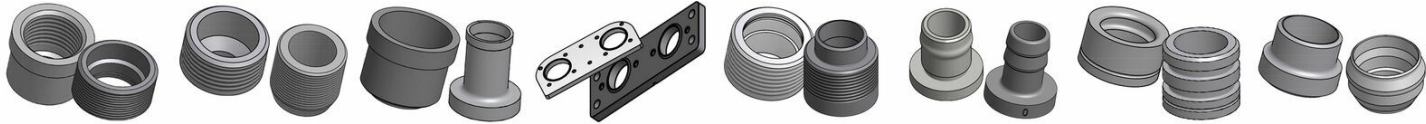

Threaded Connection   Threaded Ultra High Approved   Solder Connection   Connection Plate   Combo Connection   Hose Connection   O-Ring Connection   Weld Connection

