


# SWEP B8T

The B8T enables efficient heat exchange in applications with small flows and extreme demands for compactness. Easy to install and use, the product is small yet versatile, which makes it a good choice for a variety of one-phase and two-phase applications in many industries.



Maximum number of plates (NoP)	60
Max flow	4 m³/h (17.61 gpm)
Channel volume	0.039/0.039 dm³ (0.0014/0.0014 ft³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	0.85+(0.0749*NoP) kg 1.88+(0.165*NoP) lb
Max Particle Size (mm)	1

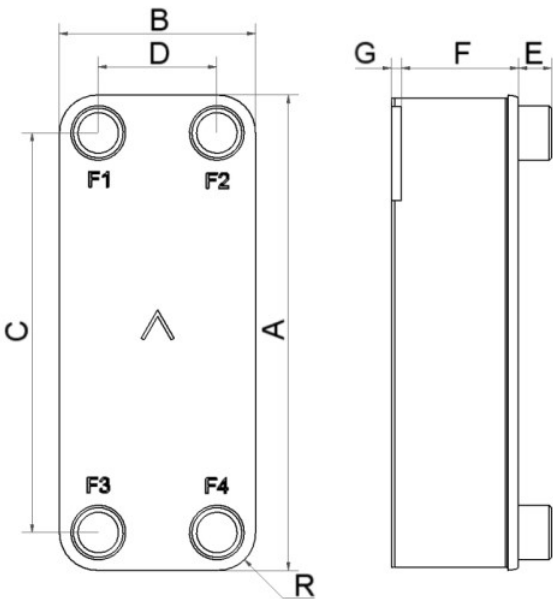

#	MM	IN
A	317	12.48
B	76	2.99
C	278	10.94
D	40	1.57
F	4+2.24*(NoP)	0.16+0.09 *(NoP)
G	7	0.28
R	18	0.71
E_1	20	0.79



Threaded Connection   Threaded Ultra High Approved   Solder Connection   Combo Connection   Hose Connection   O-Ring Connection   Weld Connection

