




# SWEP B60

The optimized B60 is the market’s leading product for gas/liquid applications. It provides optimal heat transfer where the media have extreme volume differences. The asymmetric design of the channel plates enables the fluids to have different flow rates. The exchanger is also designed for optimal cross flow.



Maximum number of plates (NoP)	300
Max flow	76.2 m³/h (335.50 gpm)
Channel volume	0.223/0.223 dm³ (0.0079/0.0079 ft³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	16.16+(0.47*NoP) kg 35.62+(1.036*NoP) lb
Max Particle Size (mm)	0.9

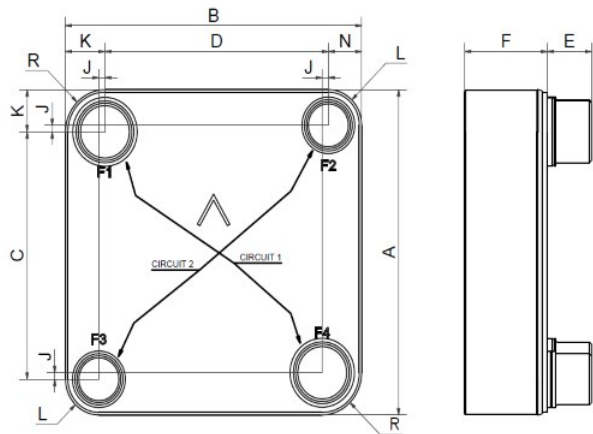

#	MM	IN
A	374	14.72
B	364	14.33
C	284.50	11.2
D	274.50	10.81
F	16,00+2,14*(NoP)	0.63+0.08 *(NoP)
G	1.50	0.06
J	7.50	0.3
K	48.50	1.91
L	41	1.61
N	41	1.61
R	49	1.93
E_1	54	2.13



Threaded Connection    Victaulic Connection    Solder Connection    Combo Connection    Flange Connection    Solder Coned Connection    Weld Connection

