


I

SWEP S500T

The S500T is optimized for use in very demanding chiller applications. The S500T is an excellent choice in modular chillers for air conditioning in larger facilities such as sport centers and shopping malls.



Maximum number of plates (NoP)	420
Max flow	155.5 m³/h (684.65 gpm)
Channel volume	0.573/0.573 dm³ (0.0202/0.0202 ft³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	16.03+(1.0186*NoP) kg 35.35+(2.246*NoP) lb
Max Particle Size (mm)	1

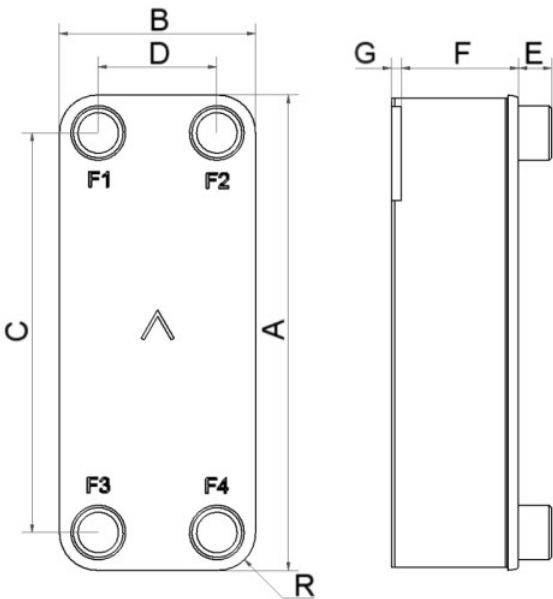

#	MM	IN
A	979	38.54
B	304	11.97
C	854	33.62
D	179	7.05
F	12,00+2,29*(NoP)	0.47+0.09 *(NoP)
G	6	0.24
R	44	1.73
E_1	54	2.13
E_2	27	1.06



Threaded Connection Victaulic Connection Solder Connection Combo Connection Flange Connection Weld Connection

