


I

SWEP S500T

The S500T is optimized for use in very demanding chiller applications. The S500T is an excellent choice in modular chillers for air conditioning in larger facilities such as sport centers and shopping malls.




| | |
|--------------------------------|---|
| Maximum number of plates (NoP) | 420 |
| Max flow | 155.5 m³/h (684.65 gpm) |
| Channel volume | 0.573/0.573 dm³ (0.0202/0.0202 ft³) |
| Material | 316/316L stainless steel plates, copper brazing |
| Weight excl. connections | 16.03+(1.0186*NoP) kg 35.35+(2.246*NoP) lb |
| Max Particle Size (mm) | 1 |

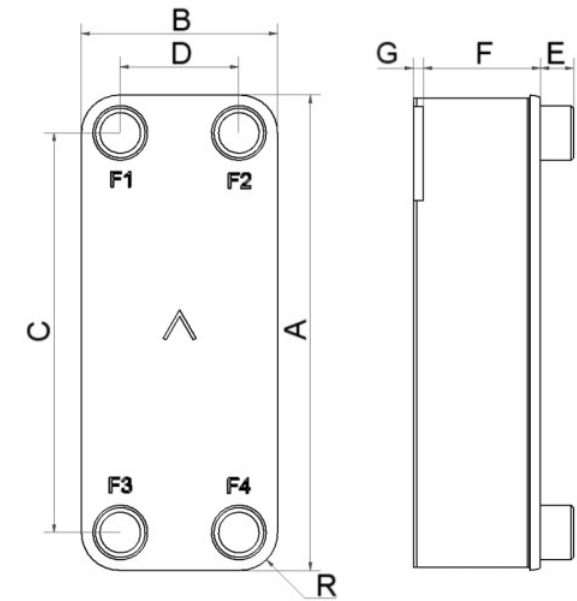

| # | MM | IN |
|-----|------------------|------------------|
| A | 979 | 38.54 |
| B | 304 | 11.97 |
| C | 854 | 33.62 |
| D | 179 | 7.05 |
| F | 12,00+2,29*(NoP) | 0.47+0.09 *(NoP) |
| G | 6 | 0.24 |
| R | 44 | 1.73 |
| E_1 | 54 | 2.13 |
| E_2 | 27 | 1.06 |



Threaded Connection Victaulic Connection Solder Connection Combo Connection Flange Connection Weld Connection

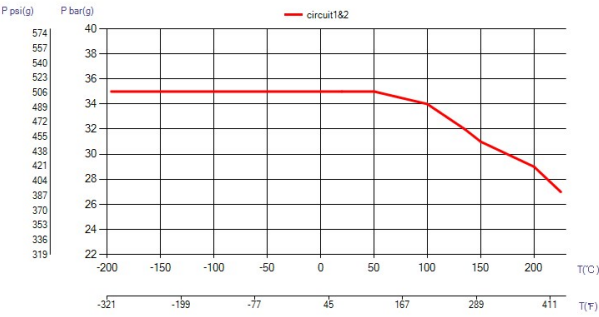

UL Tryck/Temperatur

