


SWEP P65

The efficient and powerful P65 has been specially developed for demanding high-capacity cooling applications, in particular advanced chiller and gas vaporization applications.




Maximum number of plates (NoP)	360
Max flow	155.5 m ³ /h (684.65 gpm)
Channel volume	0.599/0.599 dm ³ (0.0212/0.0212 ft ³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	27.44+(1.07*NoP) kg 60.50+(2.359*NoP) lb
Max Particle Size (mm)	1

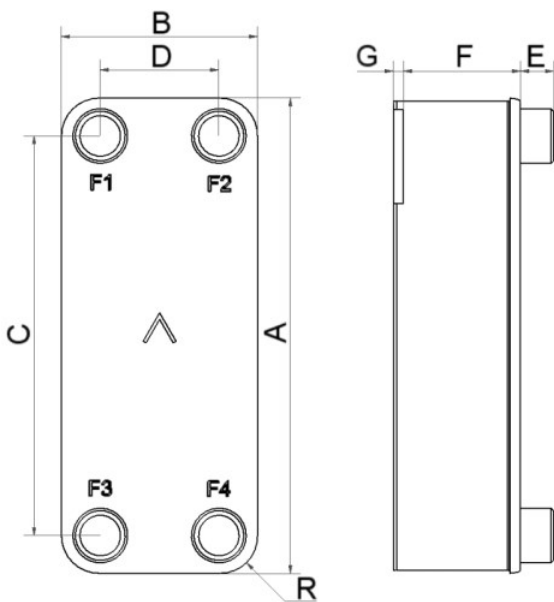

#	MM	IN
A	864	34.02
B	363	14.29
C	731	28.78
D	231	9.09
F	17,00+2,32*(NoP)	0.67+0.09 *(NoP)
G	0.50	0.02
R	67	2.64
E_1	54	2.13
E_2	112	4.41



Threaded Connection Victaulic Connection Solder Connection Combo Connection Flange Connection Weld Connection

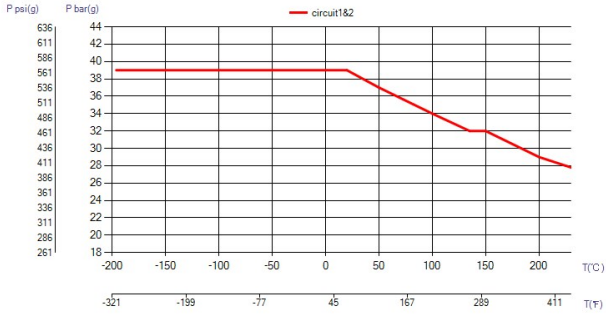

UL Tryck/Temperatur

