


SWEP V26


The V26 is based on the B26 high-performance condenser with our AsyMatrix® technology. The V-ring refrigerant distribution system is adapted for reversible air-to-water heat pumps and ensures optimal performance as an evaporator in reversed mode. The distribution system does not impact functionality or performance during condenser operation.



Maximum number of plates (NoP)	160
Max flow	11.3 m³/h (49.75 gpm)
Channel volume	0.044/0.066 dm³ (0.0016/0.0023 ft³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	1.49+(0.1105*NoP) kg 3.29+(0.244*NoP) lb
Max Particle Size (mm)	0.7

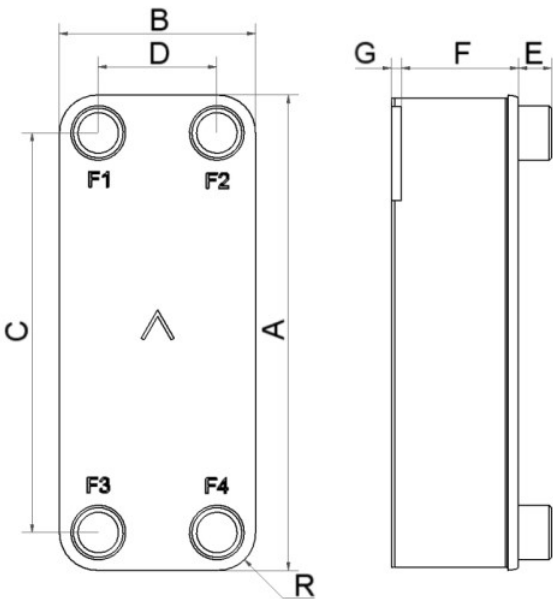

#	MM	IN
A	376	14.8
B	119	4.69
C	329	12.95
D	72	2.83
F	4,00+1,61*(NoP)	0.16+0.06 *(NoP)
G	6	0.24
R	23	0.91
E_1	20	0.79
E_2	45	1.77

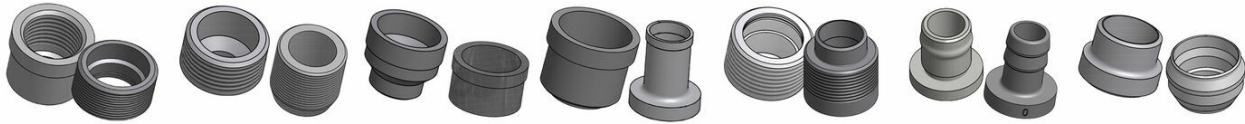

Threaded Connection Threaded Ultra High Approved Victaulic Connection Solder Connection Combo Connection Hose Connection Weld Connection

