


# SWEP V26

The V26 is based on the B26 high-performance condenser with our AsyMatrix® technology. The V-ring refrigerant distribution system is adapted for reversible air-to-water heat pumps and ensures optimal performance as an evaporator in reversed mode. The distribution system does not impact functionality or performance during condenser operation.




<b>Maximum number of plates (NoP)</b>	160
<b>Max flow</b>	11.3 m <sup>3</sup> /h (49.75 gpm)
<b>Channel volume</b>	0.044/0.066 dm <sup>3</sup> (0.0016/0.0023 ft <sup>3</sup> )
<b>Material</b>	316/316L stainless steel plates, copper brazing
<b>Weight excl. connections</b>	1.49+(0.1105*NoP) kg 3.29+(0.244*NoP) lb
<b>Max Particle Size (mm)</b>	0.7

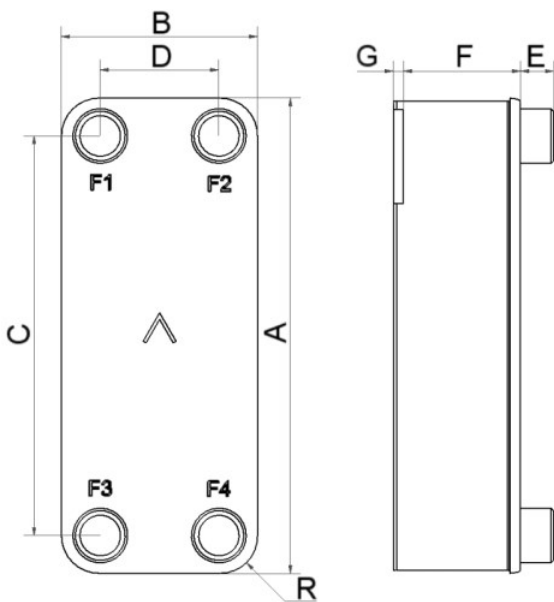

#	MM	IN
A	376	14.8
B	119	4.69
C	329	12.95
D	72	2.83
F	4,00+1,61*(NoP)	0.16+0.06 *(NoP)
G	6	0.24
R	23	0.91
E_1	20	0.79
E_2	45	1.77



Threaded Connection    Threaded Ultra High Approved    Victaulic Connection    Solder Connection    Combo Connection    Hose Connection    Weld Connection

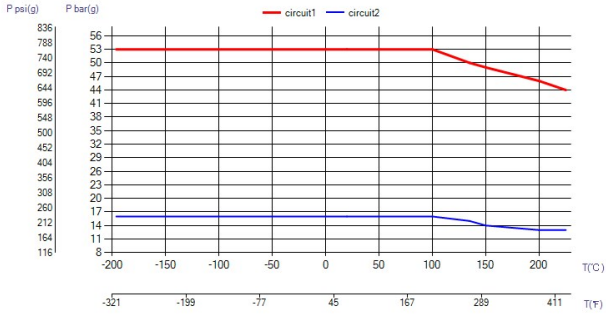

## UL Tryck/Temperatur

