




# SWEP B8LAS

The compact B8LAS is a product developed to combine the highest thermal performance with low pressure drop. With a plate geometry using that uses AsyMatrix® technology, the unit offers a high efficiency and versatile solutions for high- efficiency heat pumps and refrigeration applications.



Maximum number of plates (NoP)	70
Max flow	4 m³/h (17.61 gpm)
Channel volume	0.0204/0.024 dm³ (0.0007/0.0008 ft³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	0.84+(0.059*NoP) kg 1.85+(0.130*NoP) lb
Max Particle Size (mm)	0.6

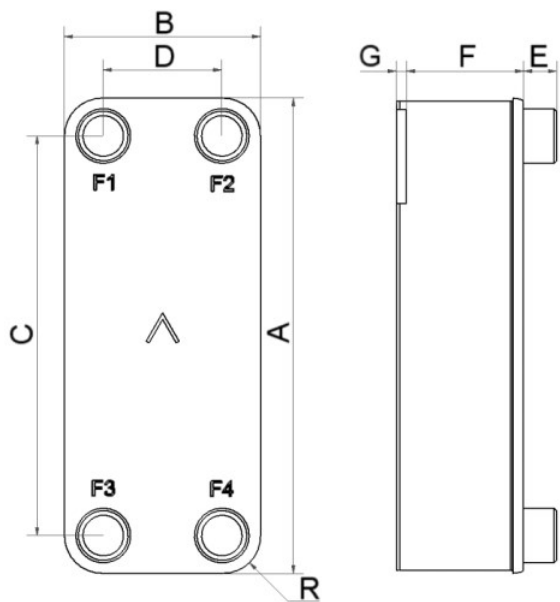

#	MM	IN
A	317.70	12.51
B	76.20	3
C	278	10.94
D	40	1.57
F	4,00+1,32*(NoP)	0.16+0.05 *(NoP)
G	6.30	0.25
R	18	0.71
E_1	20	0.79
E_2	45	1.77



Threaded Connection   Threaded Ultra High Approved   Solder Connection   Combo Connection   Hose Connection   Weld Connection

