


# SWEP B500T

The B500T has been designed to work extremely efficiently as a high-capacity condenser in various systems such as modular chillers and industrial heat pumps.




Maximum number of plates (NoP)	420
Max flow	155.5 m <sup>3</sup> /h (684.65 gpm)
Channel volume	0.573/0.573 dm <sup>3</sup> (0.0202/0.0202 ft <sup>3</sup> )
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	16.03+(0.905*NoP) kg 35.35+(1.995*NoP) lb
Max Particle Size (mm)	1

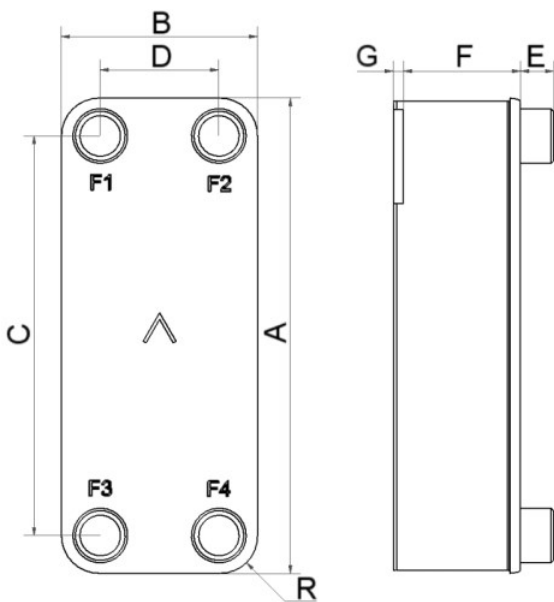

#	MM	IN
A	979	38.54
B	304	11.97
C	854	33.62
D	179	7.05
F	12,00+2,29*(NoP)	0.47+0.09 *(NoP)
G	6	0.24
R	44	1.73
E_1	54	2.13
E_2	27	1.06



Threaded Connection    Victaulic Connection    Solder Connection    Combo Connection    Flange Connection    Weld Connection

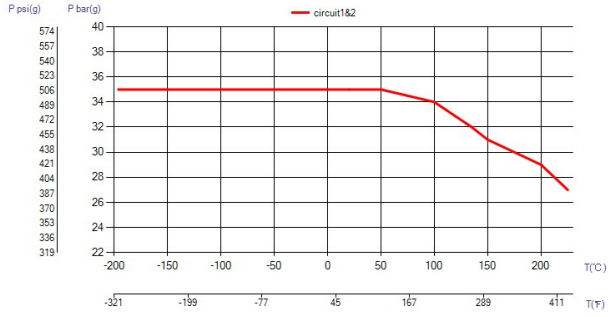

## UL Tryck/Temperatur

