

# SWEP B25T, 0107038.0-Preconfig

Configuration number (CN) with sort key: 0107038.0-Preconfig

Denomination: B25THx10/1P-SC-M 2x22U+2x1"&22U

Number of plates (NoP): 10

## Standard dimensions



#	MM	IN
A	526 (+2/-2)	20.71 (0.08/-0.08)
B	119 (+1/-1)	4.69 (0.04/-0.04)
C	479 (+1/-1)	18.86 (0.04/-0.04)
D	72 (+1/-1)	2.83 (0.04/-0.04)
F	27 (+1/-1)	1.04 (0.03/-0.03)
G	6 (+1/-1)	0.24 (0.04/-0.04)
R	23	0.91

Measurement (Tolerance)

## Connections

F = Front side connections, P = Back side connections


POSITION	ART. NO.	DENOMINATION	HEIGHT (E)	MATERIAL
F1, F3	45072	SOLDER 22U NON-CASTED	20	Stainless Steel 316
F2, F4	32566	ISO-G 1" A&SOLDER 22U	20	Stainless Steel 316

## Accessories


Not visible in sketch

ART. NO.	DENOMINATION
----------	--------------

## PED Pressure / Temperature

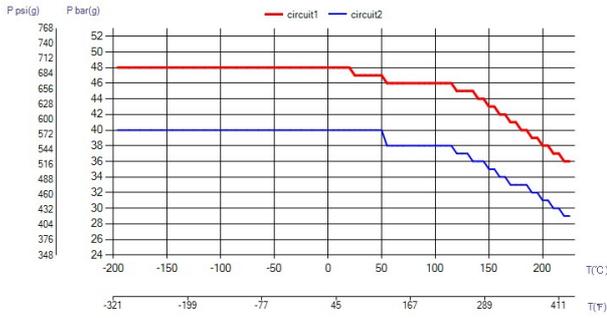

## UL Pressure / Temperature

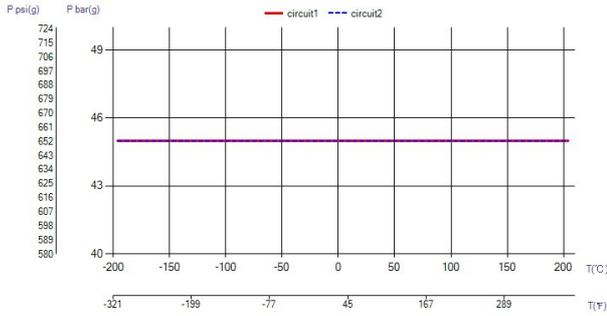

## Product Data

<b>PED Category</b>	SEP
<b>Total weight, including connections</b>	4.0 kg
<b>Total Heat Transfer area</b>	0.5 m <sup>2</sup> (5.4 ft <sup>2</sup> )
<b>Hold up volume circuit 1</b>	0.444 dm <sup>3</sup> (0.016 ft <sup>3</sup> )
<b>Hold up volume circuit 2</b>	0.555 dm <sup>3</sup> (0.020 ft <sup>3</sup> )

## MATERIALS

316/316L stainless steel plates, copper brazing

## Disclaimer

The information and recommendations in regards to the products are presented in good faith, however, SWEP makes no representations or warranties as to the completeness or accuracy of the information. Information is supplied upon the condition that the purchasers will make their own determination as to the products' suitability for their purposes prior to use. Purchasers should note that the properties of the products are both application and material selection dependent and that products containing stainless steel are still object to corrosion if used in unsuitable environments. Standard data is presented, product variants with different data may exist. Contact your SWEP sales representative for more details. SWEP may change any data without notice.